


# Continental – Contitech

FOR REFERENCE ONLY

## BLUE XTREME® HEATER HOSE

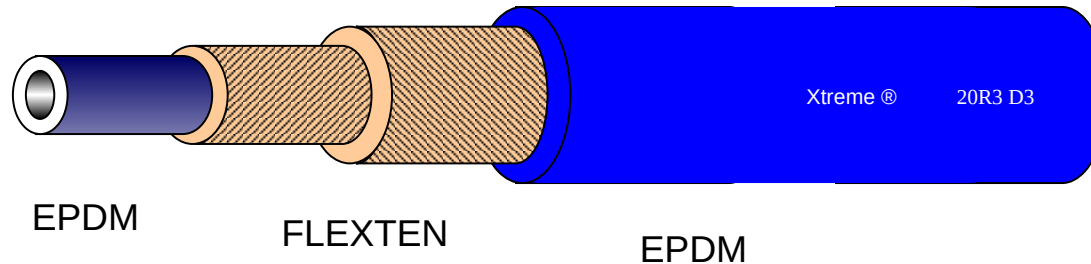

Premium construction Contitech Xtreme® Heater Hose is designed for use in high temperature applications in today's automotive and truck cooling systems. Xtreme® Heater Hose is an economical alternative to silicone hose in high temperature applications. This hose is constructed of High Temp Versigard® EPDM tube and cover with two spiral layers of Flexten® aramid fiber reinforcement. Aramid fiber is pound for pound stronger than steel. Xtreme® Heater Hose meets or exceeds SAE 20R3 Class D3-HT (high temperature designation)-EC (electrochemical) specifications. The temperature is rated up to 300° F. (Available in Black and Blue Covers)

| SIZE | INSIDE DIAMETER |       |       |       | OUTSIDE DIAMETER |       |       |       | WEIGHT |      | MIN BURST |      |
|------|-----------------|-------|-------|-------|------------------|-------|-------|-------|--------|------|-----------|------|
|      | INCH            |       | mm    |       | INCH             |       | mm    |       |        |      |           |      |
| INCH | min             | max   | min   | max   | min              | max   | min   | max   | lbs/ft | kg/m | psi       | BAR  |
| 5/16 | 0.287           | 0.335 | 7.30  | 8.50  | 0.563            | 0.610 | 14.30 | 15.50 | 0.11   | 0.16 | 250       | 17.2 |
| 3/8  | 0.350           | 0.398 | 8.90  | 10.10 | 0.665            | 0.713 | 16.90 | 18.10 | 0.15   | 0.22 | 250       | 17.2 |
| 1/2  | 0.469           | 0.531 | 11.90 | 13.50 | 0.783            | 0.846 | 19.90 | 21.50 | 0.17   | 0.25 | 250       | 17.2 |
| 5/8  | 0.594           | 0.657 | 15.10 | 16.70 | 0.909            | 0.972 | 23.10 | 24.70 | 0.21   | 0.31 | 250       | 17.2 |
| 3/4  | 0.720           | 0.783 | 18.30 | 19.90 | 1.035            | 1.098 | 26.30 | 27.90 | 0.24   | 0.36 | 200       | 13.8 |
| 1    | 0.969           | 1.031 | 24.60 | 26.20 | 1.291            | 1.386 | 32.80 | 35.20 | 0.36   | 0.54 | 175       | 12.1 |